

SUPPLIES & ACCESSORIES

PRODUCT CATALOG 2015



INDEX

Bags & Carrying Cases	28	
Compass & Clinometers	26	
Field Books	21	
Flagging	29	
Hand Tools	32-33	
Levels		
Abney	15	
Hand	14	
Markers	34	
Measuring Tapes		
Chaining Pins	22	
Lufkin	22-24	
Sokkia/Eslon	25	
Paint	35	
Planimeters		
Plumb Bobs	31	
Prisms, Prism Poles, Accessories		
Accessories	9	
Bipods & Tripods	9	
Data Collector Brackets	9	
Prisms	5-6	
Prism Poles	8,10	
Specialty Prisms	7	

Reflective Targets	. 4
Rods	
Digital	
NEDO Fiberglass	. 12
Specialty	. 13
Safety & Accessories	. 36-37
Specialty Poles	
GPS	
Range	. 11
Robotics	. 11
Stereoscopes	. 19
Surveying Markers	
Thermometers	. 27
Tripods & Accessories	
Tripods	
NEDO Tripods	
Tribrachs & Adapters	. 18

REFLECTIVE SHEET TARGETS

RS**T 0.3 mm thin, self-adhesive sheets that adhere to almost any surface. RS**N includes normal (0.5 mm) reticle lines.

210210004	RSOO Target 230 x 230 mm (1 each) (SO)
210210005	RSO5T Targets 5 x 5 mm (400 each) (SO)
210210006	RS10N Targets 10 x 10 mm (400 each)
210210009	RS10T Targets 10 x 10 mm (400 each)
210210010	RS15N Targets 15 x 15 mm (196 each) (SO)
210210013	RS15T Targets 15 x 15 mm (196 each) (SO)
210210018-SURSK	RS20N Reflective Sheet Target 20 x 20 mm (0.79 x 0.79 in.) (100/Sheet)
210210019	RS20T Targets 20 x 20 mm (100 each) (SO)
210210026	RS30N Targets 30 x 30 mm (49 each)
210210029	RS30T Targets 30 x 30 mm (49 each) (SO)
210210035-SURSK	RS50N Reflective Sheet Targets 50 x 50 mm (1.96 x 1.96 in.) (16/sheet)
210210037-SURSK	RS70N Reflective Sheet Targets 70 x 70 mm (2.75 x 2.75 in.) (9/sheet)
210210040	RS90N-K Targets 90 x 90 mm (4 each) (SO)
210210041-SURSK	RS90N Reflective Sheet Targets 90 x 90 mm (3.54 x 3.54 in.) (4/sheet)



SPECIALTY TARGETS

Easy-to-use reflective targets supplied on adhesive-backed sheets; can be directly affixed to measuring points. For alternative needs, rotary targets and a 2-point target are also available.


210210046	RT50M Magnetic Target
634412	RT90M Rotary Target (SO)
210210045	RT50G10 Rotary Target (SO)
210210049	RT90G10 Rotary Target (SO)
210210002	RC50 Reflective Target 73 x 73mm (SO)
210210187	2RT500 Reflective Target Set
210160218	RTSO S-K Pin-Pole Reflective Target



DETACHABLE ROTARY TARGET

The RT9OC can be mounted on a tribrach with the AP41 adapter or mounted directly to prism pole.

210160170 RT90C 360° Rotating Sheet Target



210160005



210160013

ADVANCED PRISM SYSTEMS (AP SERIES) 40MM

726132	AP11A Single Tilting Assembly Complete
210160013	AP32 Triple Tilting Mount
210160005	AP11 Single Tilting Mount
210160001	AP01 Prism -40 mm
210160003	APO1S -30 mm Adapter
210160006	AP11T Target
210160186	AP01-AR Prism System -30 mm offset (includes AP01 Prism and AP01S Adapter)
210165200	Sokkia AP Traverse Kit – Kit includes TR-101 Tribrach, AP41 Adapter, AP01-AR Kit, Carrying case. This is for 'leap frog' traverse method in which tribrachs may be left in place.



SIANDA	RD -30MM PRISM SYSTEMS
726668	Single Prism 0/30mm Target with Mount
726669	62mm Prism System with Metal Canister
-rism mount	s are made of all metal with a locking screw for tilting the prism.
724803	Single Tilting Mount Transit Base
724803 724806	Single Tilting Mount Transit Base Tilting Prism Assembly
	5 5

ROBOTIC PRISMS

1004684-01-SURSK Builder Series 360° Prism

SINGLE PRISMS

These prisms are compatible with the Builder Series Standard Prism Systems

62 mm Prism Plastic Canisters are available in two styles and colors:724801Prism 62 mm Silver Coated Water Sealed724802Economy Prism 62 mm Silver Coated724813Economy Prism 62 mm Copper Coated



724813



REAR LOCKING BUILDER SERIES 6 X 9

This prism assembly allows the user to quickly adjust the tilting target from behind the prism as it is pointing at the instrument to allow accurate sighting. The targets are 6×9 in. and available in either florescent orange or yellow. The prism can be either mounted in a 0 or -30 mm offset position. All come with a protective carry case for the target or complete system.

724809	Tilting Prism Mount with 6 x 9 in. Target Florescent Orange
724810	Tilting Prism Mount with 6 x 9 in. Target Florescent Yellow

These complete prism systems come with a 62 mm copper-coated prism in a sealed canister.724811Tilting Prism Assembly with 6 x 9 in. Target, Florescent Orange (Copper Coated Prism)724812Tilting Prism Assembly with 6 x 9 in. Target, Florescent Yellow (Copper Coated Prism)



REAR LOCKING BUILDER SERIES - 5.5 X 7


This prism assembly allows the user to quickly adjust the tilting target from behind the prism as it is pointing to the instrument to allow accurate sighting. The targets are $5\frac{1}{2} \times 7$ in. and are available in either florescent orange or yellow. The prism can be either mounted in a 0 or -30 mm offset position. All come with a protective carry case for the target or complete system.

724804	Economy Single Tilting Prism Mount with 5½ x 7 in. Target Florescent Orange
724805	Economy Single Tilting Prism Mount with 5% x 7 in. Target Florescent Yellow

The complete prism systems come with a 62 mm silver-coated prism in a sealed canister. Both come in a protective carry case.

60857-SURSK	Economy Tilting Prism Assembly with 5.5×7 in. Target, Florescent Orange
724808	Economy Tilting Prism Assembly with 5.5 x 7 in. Target, Florescent Yellow





STROBE PRISM ASSEMBLY

62 mm Strobe Prism Assembly with a 5½ x 7 in. or 6 x 9 in. florescent orange target. The prism can be either mounted in a 0 or -30 mm offset position. It works perfectly in low light conditions and all the electronics are housed in the prism canister. The battery is a Sanyo CR-1/3N; good for over 20 hours of use. Comes with a protective carry case for the target or complete system.

724100Strobe Prism Assembly with 5½ x 7 in. Target724101Strobe Prism Assembly with 6 x 9 in. Target

P2A SERIES 25.4 MM MINI PRISM ASSEMBLY

- Precision ground to 5 arc second accuracy
- All metal, high quality construction
- Prism is silver coated with a hard epoxy overcoat to protect against moisture and severe climatic conditions
- 40 minute vial bubble level side-mounted
- The prism can be either mounted in a 0 or -30 mm offset position
- High quality laser engraved manufactured from aircraft grade 6061-T6 billet aluminum
- All parts are anodized for long lasting durability
- Brass Pointed Ears works are vertical line target arrows
- Kit includes prism assembly, mini plumb line bracket, mini plumb bob, and durable carrying case

726862 P2A Peanut Prism Assembly



sokkia

BUILDER SERIES MINI PRISMS

System contains a copper coated 25 mm prism, a tilting holder that has either a side-mounted or center vial. The prism can be either mounted in a 0 or -30 mm offset position. Kit comes with two adapters, plumb bob holder and padded carrying case with a belt loop.

724861	Mini Prism System with Non-Adjustable Center vial
724862	Mini Prism System with Non-Adjustable Side Vial



PIN POLE WITH SLIDING 25 MM PRISM SYSTEM

System includes a 25 mm silver coated prism, three 60 cm length pole sections – in red and white 10 cm stripes (total length is 1.8 m/5.9 ft.). The prism can be mounted in a 0 mm offset position. The kit also comes with a padded carrying case and a plumb bob hook, and cap for prism to use as an offset prism by itself.

724870 Mini Prism System Kit with Pin Pole



MONITORING PRISM

25 mm specialty prism that can be mounted to a range of different surfaces and used in many different environments.

724814 90° L-Bar Monitoring Prism

COMPRESSION/COLLET LOCK PRISM POLES The Sokkia compression lock prism pole offers a secure locking system with a polished aluminum pole with a brass lock. The pole is red and white offered in three sizes with an adjustable tip and dual graduations. Also included with each pole is a carrying case. 724206 8.5 ft. Compression Lock Prism Pole – Adjustable Tip (Dual Graduations) 724207 12 ft. Compression Lock Prism Pole – Adjustable Tip (Dual Graduations) 724208 15 ft. Compression Lock Prism Pole – Adjustable Tip (Dual Graduations) 724208 15 ft. Compression Lock Prism Pole – Adjustable Tip (Dual Graduations) 724208 15 ft. Compression Lock Prism Pole – Adjustable Tip (Dual Graduations) 724208 15 ft. Compression Lock Prism Pole – Adjustable Tip (Dual Graduations) 724208 15 ft. Compression Lock Prism Pole – Adjustable Tip (Dual Graduations) 724208 724207 724208 15 ft. Compression Lock Prism Pole – Adjustable Tip (Dual Graduations) 724208 724208 724208 724208

The Sokkia knob-lock prism pole is easy to tighten and release with its large adjustable knob. The pole is red and white offered in three sizes with an adjustable tip and dual graduations. Also included with each pole is a carrying case.

724200	8.5 ft. Knob Lock Prism Pole – Adjustable Tip (Dual Graduations)
724201	12 ft. Knob Lock Prism Pole – Adjustable Tip (Dual Graduations)
724202	15 ft. Knob Lock Prism Pole – Adjustable Tip (Dual Graduations)



SOKKIA QUICK-RELEASE PRISM POLES

The Sokkia quick-release handle lock prism pole allows for quick adjustments to prism heights. The pole is red and white offered in three sizes with an adjustable tip and dual graduations. Also included with each pole is a carrying case.

724203	8.5 ft. Quick Release Lever Lock Prism Pole – Adjustable Tip (Dual Graduations)
724204	12 ft. Quick Release Lever Lock Prism Pole – Adjustable Tip (Dual Graduations)
724205	15 ft. Quick Release Lever Lock Prism Pole – Adjustable Tip (Dual Graduations)





BUILDER SERIES BIPOD

Builder series bipod assembly is designed for quick setup and field durability. These models are come with a carrying case to protect them. The bipods also have a bipod leg clip included as well.

724897	Economy Prism Pole Bipod Red
724898	Economy Mini Prism Pole Bipod Red

PRISM POLE ACCESSORIES


808850	Universal Replacement Point (Prism Pole, Bipod & Range Pole)
808851 Topographic Shoe Regular	
808852	Topographic Shoe Wide Base
808853	5/8 x 11 Adjustable Precise Tip - Fine (Compatible with Pro Series and Robotic Poles)



MINI STAKE-OUT POLES

Available in Economy or Pro-Series. Measures 1.29 ft. (15 in.) with point (1 ft. rod section).

724242	Economy Mini Stake-Out Pole Red with Carrying Bag
808042	Mini Stake-Out Pole Red (no carrying case)
808043	5.1 ft. / 2.7 m Pro Series Aluminum Knob Lock Mini Pole

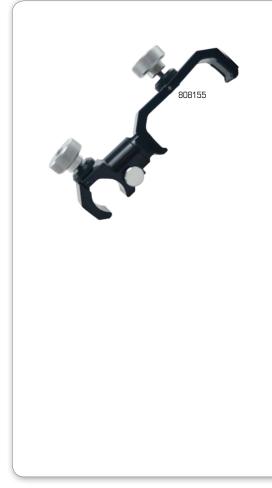

DATA COLLECTOR BRACKETS

Pro Series Crush Proof 1.25 in. Pole Claw Clamp with Pro Series Cradle

- Crush proof style pole clamp and cradle with a push button quick release
- 1.25 in. pole clamp capacity
- 20 different angles snap-in adjustment with 2 hardened stainless steel lock pins
- Anti-slip diamond knurled lock knobs
- Constructed of aircraft grade 6061-T6 billet aluminum
- Black anodize finish with high tech laser engraving
- Made in the USA

808152	Claw Clamp & Cradle for Allegro/Explorer
808153	Claw Clamp & Cradle for Archer/MINI
808154	Claw Clamp & Cradle for SHC25/25A
808155	Claw Clamp & Cradle for SHC2500/FC-2500
808156	Claw Clamp & Cradle for SHC250/FC-250
808158	Claw Clamp & Cradle for SHC236
808160	Pole Clamp, Quick Release with Vial & Compass
808161	Pole Clamp, Quick Release Plain
808162	Cradle, Quick Release for SHC2500/FC-2500
808163	Cradle, Quick Release for Ranger & TSC2
808164	Cradle, Quick Release for Allegro/Explorer
808165	Cradle, Quick Release for SHC250/FC-250
808166	Cradle, Quick Release for FC-200
808167	Cradle, Quick Release for Nomad
808168	Cradle, Quick Release for SHC236
808169	Cradle, Quick Release for STSC3 & Ranger 3
1000183-01-SURSK	4 Screw Pole Mount Bracket for Mesa
1004111-01-SURSK	Bracket for FC-500/Archer2
1005783-01	S10 Bracket and Clamp

PRO SERIES LEVER LOCK PRISM POLES

- User friendly lever lock mechanism
- One hand operation
- Precision CNC marked graduations won't fade or rub off
- · Heavy duty aluminum construction with electrostatic epoxy powder coat finish
- 40 minute top-adjust vial bubble level
- Fine threaded precise tip allows for precision height adjustment
- Stainless steel tip points, ultra light weight corrosion resistant hybrid design
- Available in red/white bands
- Lightweight

727066

8.5 ft. Pro Series Aluminum Lever Lock Prism Pole, Dual Graduations

PRO SERIES KNOB LOCK PRISM POLES

- User friendly lever lock mechanism
- One hand operation
- Slip resistant molded rubber knob
- Precision CNC marked graduations won't fade or rub off
- · Heavy duty aluminum construction with electrostatic epoxy powder coat finish
- 40 minute top-adjust vial bubble level
- Fine threaded precise tip allows for precision height adjustment
- Stainless steel tip points, ultra light weight corrosion resistant hybrid design
- Available in red/white bands
- Lightweight

808200	8.5 ft. Pro Series Aluminum Knob Lock Prism Pole, Dual Graduations
808201	12 ft. Pro Series Aluminum Knob Lock Prism Pole, Dual Graduations
808202	15 ft. Pro Series Aluminum Knob Lock Prism Pole, Dual Graduations
808204	3.6 m Pro Series Aluminum Knob Lock Prism Pole, Metric



PRO SERIES BIPODS & TRIPOD

- Original quick snap bipod & tripod assembly with dual push button thumb release for rapid level adjustment
- Quick Closure Pole Lock Mechanism allows fast attachments
- Accepts pole diameters of 0.75 to 1.5 in. [19 38 mm]
- Quickly and effortlessly convert to a tripod by adding an optional 3rd leg
- Simple few additional twist of lock knob to secure pole to bipod
- Wide stance pivot tang to improve stability by distributing center of mass
- All metal CNC construction
- Stainless steel lightweight points included
- Manufactured from aircraft grade 6061-T6 billet anodized aluminum, stainless steel and brass

808896	Pro Series Prism Pole Thumb Release Tripod – Red
808897	Pro Series Prism Pole Thumb Release Bipod – Red
808898	Pro Series Mini Prism Pole Thumb Release Bipod – Red
808895	Additional Leg for Pro Series Bipod





ROBOTIC POLES

The Sokkia robotic poles all feature all of the benefits of the "Pro Series" line of product. The poles are available in both aluminum and carbon fiber. The robotic poles have a D-shape pole to keep it from twisting and always aligned for use with the RC unit. 727071 is the standard Robotic Prism Pole sold with the RC-PR5/SX system.

727070	12 ft. Aluminum Prism Pole for RC-PR3 (Dual Grads - Feet / Tenths & Metric)
727071	8 ft. Aluminum Lever Lock Prism Pole for RC-PR4/5, Feet
727074	8 ft. Carbon Fiber Lever Lock Prism Pole for RC-PR4/5, Feet
727075	8.5 ft. Carbon Fiber Lever Lock Prism Pole for RC-PR4/5, Meters



GPS POLES

The Sokkia GPS pole lineup features a wide variety of styles. Choose from adjustable height to 2 m fixed height. Also available is a pole with anti-crush feature, so your data collector clamp will not compromise the pole. The 808016 is the pole that comes with GRX2 and GHX2 systems standard.

8080152.5 m GPS Adjustable Rover Pole, Knob Lock – Dual Graduations8080162 m GRX1/GRX2 Rover Pole, Carbon Fiber, 2 section	
808018	2 m Snap Lock GPS Rover Rod
808019	2 m Snap Lock GPS Rover Rod, Aluminum
808090	2 m GPS Anti-Crush Aluminum Rover Rod, 2 Section - Sokkia Green
724290 2 m Economy GPS Aluminum Rover Rod, 2 Section - Sokkia Green with carrying case	
724291	2 m Economy GPS Carbon Fiber Rover Rod, 2 Section with carrying case



GPS POLE ACCESSORIES

Quick Release assembly for removal of GNSS receivers or antennas. Uses $5/8 \times 11$ in. threading, compatible with nearly every GNSS product.

808047	GPS Quick Release Assembly (top and bottom)
808048	GPS Quick Release Top (antenna mount)
808049	GPS Quick Release Bottom (pole mount)

808848

HEAVY-DUTY RANGE POLES

Alternating 12 in color sections orange and white.

808849	4 ft. Range Pole Section
808848	8 ft. Range Pole 2 Sections with Point
808847	12 ft. Range Pole 3 Sections with Point



POLE PEG ADJUSTING JIG

This simple bracket allows you to adjust and calibrate pole vials in your office. The adjusting jig features a simple L-bracket to set the pole point into and a knob adjusting top to center the pole vial prior to adjusting the bubble.

724301 Pole Peg Adjusting Jig

SOKKIA SK LEVEL RODS

- Unique patented oval shape permits equal size graduations full-length, prevents rod from rolling and is easier to hold
- Numerals and graduations are epoxy-protected for maximum wear-resistance and sized for maximum readability
- · Sections cushioned with glides to prevent wear
- Linear accuracy exceeds 1 in 4,000
- Made from strong, corrosion-proof fiberglass that is lightweight and won't warp or swell
- Rods have height measuring gauge on back side except for 807368 or 807349
- Female threaded hole (5/8 x 11 in.) on top for mini-prism
- Made from non-conductive materials

807344	18 ft. SK Rod, 5 sections, ft. / 10ths
807338	25 ft. SK Rod, 7 sections, ft. / in.
807348-SURSK	25 ft. SK Rod, 7 sections, ft. / 10ths
807368	25 ft. / 7 m in length, 7 sections, meters/decimeters / 1/2 centimeters & ft. / 10ths / 100ths
807349	32 ft. in length, 9 sections, ft. / 10ths / 100ths with attached footplate

NEDO® FIBERGLASS LEVELLING RODS

- Extremely robust design with Anti-Jam® buttons made of brass ensure a long life
- High precision scale on front and back
- Scale on back allowing for overall height readings
- Ergonomically designed shape for a better grip
- Non-conductive under dry conditions
- Laser receiver brackets are easily attached
- Free carrying bag and snap-on rod level included
- Made in Germany

809109	3 m Fiberglass Leveling Rod, 3 sections, m/cm/5 mm	
809102	13 ft. Fiberglass Leveling Rod, 3 sections, ft/10/100	
809106	13 ft. Fiberglass Leveling Rod, 3 sections, ft/in/8th	
809110	4 m Fiberglass Leveling Rod, 3 sections, m/cm/5 mm	
809103	16 ft. Fiberglass Leveling Rod, 3 sections, ft/10/100	
809107	16 ft. Fiberglass Leveling Rod, 3 sections, ft/in/8th	
809111	5 m Fiberglass Leveling Rod, 3 sections, m/cm/5 mm	
809104	25 ft. Fiberglass Leveling Rod, 3 sections, ft/10/100	
809112	7.6 m Fiberglass Leveling Rod, 3 sections, m/cm/5 mm	
\ \		

SDL DIGITAL LEVEL RODS

Sokkia's RAB-Code (RAndom Bidirectional Code) staffs are designed exclusively for use with Sokkia Digital Levels. Staffs are available in Invar, fiberglass and aluminum in various lengths.

738037	BIS30A New Super Invar RAB-code Staff (SO)
210154100	BIS20 2 m Invar Staff Set for SDL30 (Two Rods with Case) (SO)
210154200	BIS20 3 m Invar Staff Set for SDL30 (Two Rods with Case) (SO)
210154300	BGS30 4 m Barcode Staff with Case (metric grads on back)
210154400	BGS50 5 m Barcode Staff with Case (metric grads on back)
210154500	BGS50G3 16 ft. Barcode Staff with Case (ft/10th on back)
210154300	BSS30 30 cm Steel Barcode Section with Case (SO)
210160222	BSS60 60 cm Steel Barcode Section with Case (SO)
210164300	BAS55 Aluminum Barcode Staff 5 m with Case
210150031	GS20L Circular Level for BGS Rod, 20"
210150032	GS60L Circular Level for BGS Rod, 60"/2 mm with Case
809601	Base Plate (Turtle)





809104

5


809103


7 6

5

4

2

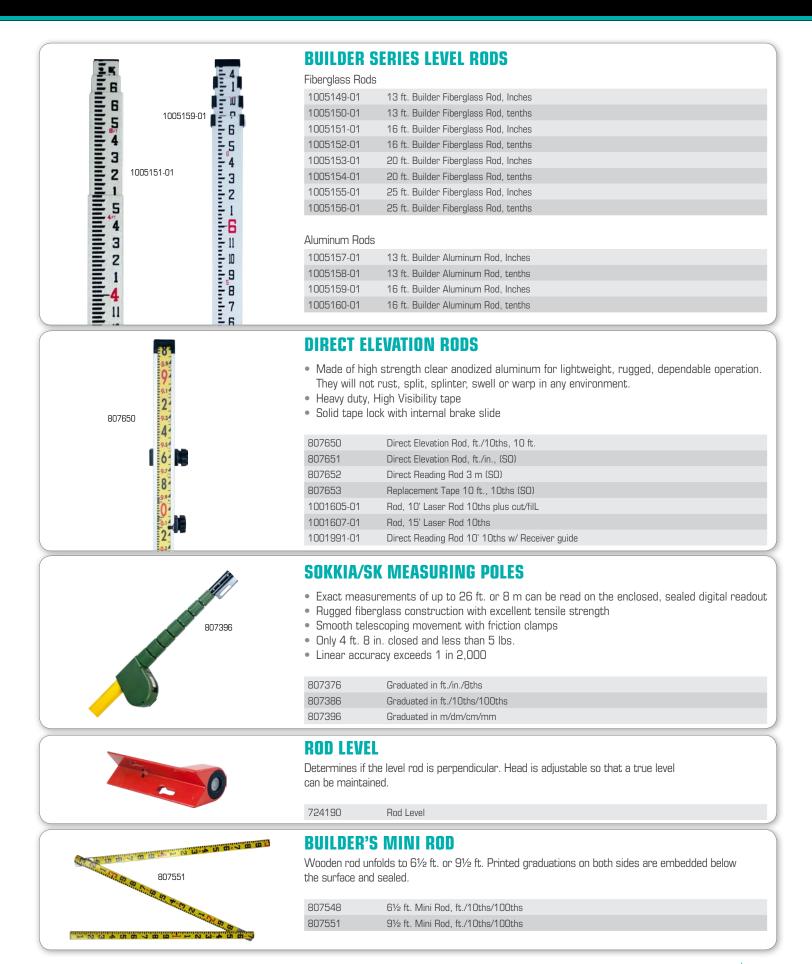

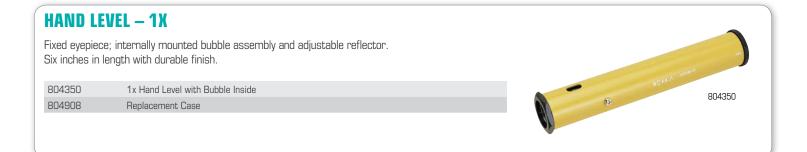

MAGNIFYING HAND LEVEL – 5X

Provides accuracy at greater distances. Objective lens and eyepiece slide for easy focusing. Stadia lines with 1:100 ratio. Length of $7\frac{1}{2}$ in. Padded belt loop case included.

8042605x Magnifying Stadia Hand Level804907Replacement Case



SQUARE-TYPE HAND LEVEL – 1X

Fixed eyepiece; internally mounted bubble assembly and adjustable reflector. ${\bf 6}$ in. in length with durable finish.

804520Square-Type Hand Level804912Replacement Case





MAGNIFYING ABNEY LEVEL WITH STADIA – 5X

Percent scale in both directions easy-slide focusing motions for objective and eyepiece. 1:100 stadia. Enamel finished 7% in. barrel extends to 8 5/8 in. Measure existing grades with the 1 x 3% in. flat base. Padded belt-loopcase included.

804755	Magnifying Abney Level with Stadia
804911	Replacement Case



ABNEY LEVEL WITH CLINOMETER

Tube is 5 1/8 in. long. Radius arc of 1 1/8 in. graduated in degrees (0-90°) in both directions; vernier reading of 10 minutes. Slope scale 1:1 and 1:10. Padded belt-loop case included.

804710	5" Arc, Degree and Slope Abney Level
804715	5" Arc, Percent and Degree Abney Level
804905	Replacement Case



TOPOGRAPHIC ABNEY LEVEL

Two interchangeable arcs offer chainage correction, degrees (0–60°) in both directions and percent of grade. Index has friction movement for fine adjustment. Non-glare 6 3/8 in. aluminum level tube extends to 7 3/8 in. Padded belt-loop case included.

804745	6 3/8 in. Top with Two Arcs Abney Level
804907	Replacement Case



DOUBLE RIGHT ANGLE PRISM

Two prisms allow for sight to the right and left and clear optical glass for viewing straight ahead. Metal construction. Includes leather case.

724780 Double Right Angle Prism

BUILDER	'S SERIES TRIPODS	
724445	Aluminum Tripod Light Weight Quick Clamp	
	Height: 34" min / 63" max / 30" closed	5⁄8 x 11 Head
724645	Aluminum Tripod Medium Weight Quick Clamp	
	Height: 38" min / 63" max / 42" closed	5⁄8 x 11 Head
724647	Domed Medium Weight Aluminum Tripod	
	Height: 38" min / 63" max / 42" closed	5⁄8 x 11 Head
724675	Aluminum Tripod Medium Weight Twist Lock	
	Height: 42" min / 70" max / 45" closed	5⁄8 x 11 Head
724676	Aluminum Tripod Medium Weight Twist Lock (Black)	
	Height: 42" min / 70" max / 45" closed	5⁄8 x 11 Head
724251	Fiberglass Tripod with Dual Clamp	
	Height: 42" min / 70" max / 45" closed	5⁄8 x 11 Head
724252	Wood Tripod Dual Clamp with Tool Kit	
	Height: 42" min / 70" max / 45" closed	5⁄8 x 11 Head
724281	Wood Fiberglass Tripod Twist Lock	
	Height: 38" min / 63" max / 42" closed	5⁄8 x 11 Head
724282	Wood Fiberglass Tripod Quick Clamp	
	Height: 38" min / 63" max / 42" closed	5⁄8 x 11 Head



PROFESSIONAL SERIES TRIPODS

All North American maple with metal hardware (no plastic). The hinges are self-adjusting and it has durable nylon bushings for smooth operation. Tripod shoes have large spurs; hardened steel replaceable tips. Bright yellow or Sokkia green finish. Carrying handle.

751250	Sokkia Wide-Frame Wood Tripods (Green)		
	Height: 72" max / 45.75" closed	Weight: 14.5 lbs.	5⁄8 x 11 Flat Head
751252	Sokkia Wide-Frame Wood Tripods (Yellow)		
	Height: 72" max / 45.75" closed	Weight: 14.5 lbs.	5⁄8 x 11 Flat Head



SOKKIA WIDE-FRAME ALUMINUM TRIPOD

Anodized finish in high-visibility International orange and silver with sling strap for easy hand or shoulder carrying. Extra-long shoes with large spurs for greater anchoring power. Hardened steel with a screw-clamp leg assembly.

1005306-01

PFA2 Aluminum Tripod, Flat Height: 67" max / 41" closed

Weight: 8.6 lbs.

5⁄8 x 11 Flat Head





NEDO® SURVEYORS' GRADE WOODEN TRIPODS

- Big round tripod head for easy instrument set-up (approximately 6 1/2 in. diameter)
- Plastic coated wooden legs ensure a long life
- Available with Quick Clamp, Screw Clamp or both
- Brass hinge pins for extra stability
- Replaceable points made of hardened steel
- Snap Cap to protect tripod head
- Carrying strap for easy handling

809501	Surveyors Grade Wooden Tripods with Dual Clamp	
	Height: 40" min / 66" max / 44" closed	Weight: 17 lbs.
809502	Surveyors Grade Wooden Tripod with Screw Clamp	
	Height: 40" min / 66" max / 44" closed	Weight: 17 lbs.



ELEVATING TRIPODS

- Robust aluminum top plate with 5/8 x 11
- Double telescope for a large working range
- Anodized scale
- Robust crank mechanism for easy handling
- Built-in bubble for easy setup
- Slip-Guard to prevent the legs from spreading unintentionally
- Break-proof aluminum quick release levers

Medium Duty Elevating Tripod	
Height: 44" min / 93" max / 48" closed	Weight: 12 lbs.
Heavy Duty Elevating Tripod	
Height: 34" min / 112" max / 44" closed	Weight: 15 lbs.
Extra Heavy Duty Elevating Tripod	
Height: 33" min / 119" max / 52" closed	Weight: 19 lbs.
	Height: 44" min / 93" max / 48" closed Heavy Duty Elevating Tripod Height: 34" min / 112" max / 44" closed Extra Heavy Duty Elevating Tripod



TRIPOD STABILIZER

Designed to provide stability when working indoors on concrete and other hard surfaces. Made of heavy-duty aluminum and collapses for compact storage. Comes with rubber O-rings that fit over the feet of the tripod for extra security.

808903 Tripod Stabilizer

SOKKIA.COM 17

PRECISION TRIBRACHS

Tribrachs accept Sokkia EDM systems, electronic and optical theodolites, as well as equipment and accessories. Base plate has standard 5/8 x 11 threads and circular level vial with a sensitivity of 10 min./2 mm push-pull slide focus.

WOA Precision T	ribrachs with Optical Plummet (Optical plummet range: 1.5 to 50 ft. [0.5 to 15 m])
221470200	WA201 Precision Tribrach with Optical Plummet
307486007	TR-102 For manual TS and GPS
307796006	TR-111 For motorized TS with optical plummet
307796007	TR-112 For manual TS with optical plummet
307486006	TR-101 For motorized TS without optical plummet

WAI Precision Tribrachs

221470100	WA200 Tribrach without Optical Plummet (Standard Total Station)
221470300	WA250 Tribrach without Optical Plummet (Motorized Total Station)

LASER TRIBRACH

Bright focused laser dot provides accurate and quick positioning over a point. Push button on/off switch with standard 8 minute circular vial. Includes standard 3 volt CR2 lithium battery.

724034

Tribrach with Laser Plummet, Black

BUILDER SERIES TRIBRACHS

22-006008-01 Tribrach with Optical Plummet, Black 22-006008-01-SURSK Tribrach without Plummet, Black



TRIBRACH ADAPTERS

Adapter accepts all mount and target assemblies; has 60 second level vial for accurate leveling and centering that's adjustable to match height of optical axis above the tribrach.

Use with WAI Precision Tribrach: 731134

210160016 AP41 Tribrach Adapter with Optical Plummet

Use with WAI Precision Tribrach: 731135 (same features as 726150 without the optical plummet) 210160018 AP44 Tribrach Adapter (SO)

Mounting adaptor for GPS, prisms and target systems with most tribrachs - 5/8 x 11 center stud 22-006009-01-GPSSK Tribrach Adapter Fixed

Adapts GPS, prisms and target systems to most tribrachs - has removable center plug with 5/8 x 11 threads and locking screw. Removable center available as a replacement separately 51842-SURSK Tribrach Adapter with removable center

Includes 5/8 x 11 male thread for attaching GPS, prisms and target systems. Threaded portion attached to rotating plate for easy aiming. Plate has knurled edge and friction stop 724042 Tribrach Adapter friction rotatable





2101531A0 with 210150087

MS27

The MS27 offers unmatched precision and ease of use for viewing and interpreting aerial photographs. The distance between the stereo pairs is 27 cm, and the field of view is a generous 18 x 23 cm. TRA2 tracking device (option) allows for accurate stereoscopic observation over entire overlapped portions of photographs. Illumination unit LA3 is provided as an optional accessory.

MS27 Specifi	cations			
Main Unit				
Distance of optica	l path	27 cm		
Magnification		Swing-in Magnifier: 1.8x BN3 Binocular: 3x, BN8A Binocular: 8x		
Field of view of ste	ereoscope	18 x 23 cm		
Field of view of bin	ocular	BN3: 70 mm, BN8A: 27 mm		
Range of eye-span	I	55 to 75 mm		
Weight		4.0 kg (8.8 lbs.)		
PB1 Parallax	Measuring Bar			
Minimum graduati	on / estimation	0.05 mm / 0.01 mm		
Measurement range		O to 50mm		
Length / weight		39.5 cm / 0.5 kg (1.1 lbs.)		
TRA2 Tracking	g Device (optional)*			
Size of photograph	าร	Up to 45 x 45 cm		
Range of displacer	ment	Latitudinal: 550 mm / Longitudinal: 450 mm		
*The TRA2 cannot	*The TRA2 cannot be used with the LA3 Illumination Unit.			
2101531A0	MS27 Stereoscope Complete with BN3 & PB1			
210153100 MS27WO Stereoscope Main Unit in Case		e Main Unit in Case		
210153800	LA3 Illumination Unit			
210153700	BN3 3x Binoculars Onl	у		
210153600	PB1 Stereometer only	(Parallax Bar)		
210150087	TRA2 T-27 Track Attac	chment for MS27		



210153300

This small mirror stereoscope is compact yet practical with a 16 cm optical path which provides a wide field of view.

BN8A 8x Eyepiece Set Converts BN3 to BN8

MS16 Specif	ications		
Distance of optic	al path	16 cm	
Magnification		1.5x	
Field of view		10 x 10 cm	
Weight		0.7 kg (1.5 lbs.)	
210153200	MS16 Small I	Airror Stereoscope	




210153200

PS4A & PS2A

Handy lens-type stereoscopes. Distance between lenses is adjustable from 56 mm to 75 mm. Two magnifications available, 4x (PS4A) and 2x (PS2A).

210153400	PS2A Pocket Stereoscope (2x with Soft Case)
210153500	PS4A Pocket Stereoscope (4x with Soft Case)

PLANIMETERS

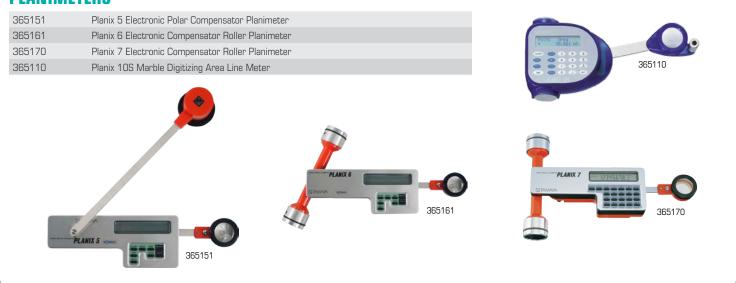

	Planix 5	Planix 6	Planix 7	Planix 10S
X, Y Coordinates				
External outputs				
Area	•	•	•	•
Side length				•
Line length				•
Radius				
Center point				
Triangle (base length, height and area)				
Angle (side length and angle)				
Scale: Key input			•	•
Scale: PLOT-real measurement correction				•
Measuring area for differing scale of X,Y			Area Only	Area Only
Sum and average measurement	•	•	•	•
Decimal point set-up				•
Auto power off	•	•	•	•
Calculation				
Display	Dot LCD / 8 digits x 1 line	Dot LCD / 8 digits x 1 line	Dot LCD / 8 digits x 1 line	Dot LCD / 16 digits x 2 line
Measuring range	300 mm x 300 mm	300 mm x 3 m	300 mm x 3 m	300 mm x 10 m
Minimum line reading	± 0.1 cm	± 0.1 cm	± 0.1 cm	\pm 0.05 cm
Accuracy	± 0.2%	± 0.2%	± 0.2%	± 0.1%
Auto close function				
Automatic numbering				
Printer				
RS-232C interface cable				



FIELD BOOKS

1 0	Left page with blue horizontal lines and red vertical lines. Right page with 4 squares per inch and red vertical line.				
815260	Field Book (4½ x 7¼ in.)				
Both pages with	10 squares per inch with inch lines slightly heavier				
815275	Cross-Section Book (61/2 x 81/2 in.)				
Both pages with blue horizontal lines and red vertical lines. Six vertical columns per page					
815250	Level Book (4 x 6½ in.)				
Both pages with	blue horizontal lines and red vertical lines. Six vertical columns per page				
815255	Level Book (4½ x 7¼ in.)				
Loose-Leaf Shee sold by the pack	ts: Single sheets: 50 singles per package, 12 packages per carton, age				
815255	Level Book (4½ x 7¼ in.)				

SPECIALTY FIELD BOOKS

Left page level r	Left page level ruled, right page with 8 squares per inch and red vertical center line			
815220	Mining Transit Book (4½ x 7¼ in.)			
Left page level r	Left page level ruled, right page with 10 squares per inch, red vertical center line and heavy inch lines			
815230	Engineer's Field Book (4½ x 7¼ in.)			

TRANSIT/ECONOMY FIELD BOOKS

Left page level r	eft page level ruled, right page with 8 vertical and 4 horizontal blue lines and red vertical center line				
815200	Transit Field Book (4½ x 7¼ in.)				
Loose-Leaf Shee sold by the pack	ts: Single sheets: 50 singles per package, 12 packages per carton, age				
815300	Economy/Student Field Book				
Heavy paper cov	Heavy paper cover, spiral bound and 36 pages				
815205	Level Book (4 x 6½ in.)				
Heavy paper cover, saddle stitched (stapled) and 32 pages					
815210	Economy Field Book				

RITE-IN-THE-RAIN® WEATHERPROOF FIELD BOOKS

HIGH-VISIBILITY BUCKRAM BINDERS

Buckram-covered stiff board construction-lined with black paper. Six-ring style.			
815370	50-page capacity binder with $\frac{1}{2}$ in. rings. Size: $5\frac{1}{2} \times 7\frac{3}{4}$ in.		
815375	100-page capacity binder with $\frac{3}{4}$ in. rings. Size: $5\frac{1}{2} \times 7\frac{3}{4}$ in.		

HIGH-VISIBILITY POLYETHYLENE BINDERS

One-piece, 55-g	One-piece, 55-gauge single-piece cover resists dirt and withstands tough weather. Six-ring style.		
815378	100-page capacity with ¾ in. rings. Size: 5½ x 7¾ in.		
815379	50-page capacity with $\frac{1}{2}$ in. rings. Size: 5% x 7% in.		

SOKKIA.COM 21

122110

LUFKIN TAPE REEL AND FRAME

- For 1/4" or 5/16" x 100' lengths of steel tapes only
- Nickel-plated reel, 2-arm with rollers in each arm for smooth winding
- Oversize drum with long, one-piece winding handle, quick return of line

Item No.	Lufkin No.	Length and Width	Graduations
120150	31100	100'/30 m x ¼ or 5/16 in.	Figure 8, for chain-style tapes
120152-S	31-200	200'/50 m x ¼ or 5/16 in.	D-handle, point, for chain-style tapes
120153 (SO)	31-300	300'/100 m x ¼ or 5⁄16 in.	D-handle, point, for chain-style tapes



LUFKIN CHAIN-STYLE TAPES - SUPER HI WAY NUBIAN® 5/16 IN.

- Nominal thickness .017"
- Easy-to-read raised graduations
- Lines have a blank space at each end
- Extra foot before zero graduated right to left to 1/10ths and 1/100ths
- Balance marked every foot except last foot of each 100' length, 100ths
- Reels required: 120150, 120152-S, 120153

item No.	Lufkin No.	Length and Width	Graduations
122110	09100B	1201-50, 31-100, 100 ft.	Add feet
122120	09200B	1201-52, 31-200, 200 ft.	Add feet
122130 (SO)	09300B	1201-53, 31-300, 300 ft.	Add feet

CHAINING PINS


Set of 11 chaining pins with alternating red and white colors

724300

14 in. Chaining Pins (Set of 11)

LUFKIN BANNER TAPES

Item No.	Lufkin No.	Length and Width	Graduations	Color
120315-S (SO)	C216D	100 ft., 3⁄8 in. wide blade (ring end)	ft./10ths/100ths	Chrome
120325-S	HC256	100 ft.	Inches	Chrome
120335-S (SO)	HW223D	50 ft.	ft./10ths/100ths	n/a
120345-S	HW226D	100 ft.	ft./10ths/100ths	n/a



LUFKIN ARCHITECT'S POCKET SCALE

Yellow-clad $1\!\!\!/_4$ in. x 5 ft. blade with black markings and automatic return. Scales: $1\!\!\!/_4$ and $1\!\!/_8$ in. to foot.

120364-S Architect's Pocket Scale Lufkin No.: W393

NOTE ON GRADUATION STYLES


Add style feet:

Tapes have a blank space at each end. The extra foot before zero is graduated in 10ths and 100ths from right to left. Balance is marked every foot except the last foot of each 100 ft. length, which is in 100ths of feet.

Add style metric:

Tapes have a blank space at each end. The decimeter before zero is graduated in millimeters from right to left. Balance is marked every decimeter to meter.





LUFKIN PEERLESS YELLOW CLAD TAPES

- Designed for engineers and surveyors who prefer a 4-arm reel
- Chrome Clad[®] and yellow clad blade
- 1/4"/6 mm wide and .016" thick
- Subdivided line removes easily from reel
- Long, easy-action winding handle that locks line in any position
- Nickel plated reel, 4-arm with rollers in each arm for smooth winding
- Open design construction aids in drying line and clearing out dirt
- Pair of 580 finger rings, a 579 engineers conversion rule are furnished
- Reel available separately

Item No.	Lufkin No.	Refill No.	Lufkin Refill	Length/Width	Graduations
121615	Y1276D	121616	RY1276D	100 ft.	ft./10ths/100ths
121620	Y1278	121621	RY1278	200 ft.	ft./in./8ths
121625	Y1278D	121626	RY1278D	200 ft.	ft./10ths/100ths
121630	Y1279	121631	RY1279	300 ft.	ft./in./8ths
121635 (SO)	Y1279D	n/a	RY1279D	300 ft.	ft./10ths/100ths

125253

LUFKIN NY-CLAD STEEL TAPES

- Durable nylon coating on blade resists wear under extreme conditions
- Super fast 3-to-1 blade retraction saves time in the field
- Steel blade will not stretch under normal use
- Engineers' Scale 10ths & 100ths of feet

Item No.	Lufkin No.	Refill No.	Lufkin Refill	Length/Width	Graduations
125253	PS1806	n/a	n/a	100 ft.	ft./inches
125254	PS1806D	n/a	n/a	100 ft.	10ths/100ths
125255	PS1808	n/a	n/a	200 ft.	ft./inches
125256	PS1808	n/a	n/a	200 ft.	ft./10ths/100ths

LUFKIN FOLDING RULES

- For measuring left to right, right to left
- Marked both sides
- Graduated in feet, inches and 1/16ths on both sides and both edges
- Flat inside markings lie close to the work

Item No.	Lufkin No.	Length	Graduations
120247-S	062CME	6 ft./2 m	ft./in./16ths ft. and metric
120566 (SO)	966	6 ft.	ft./in. and metric
120575	1066D	6 ft.	ft./10ths/100ths and ft./in./16ths ft., Heavy Duty
120576	1066DM	6 ft./2 m	ft./10ths/100ths/metric, Heavy Duty

125248

LUFKIN FIBERGLASS OPEN-REEL TAPES

- Lightweight open reel is easy to handle and rewind
- Hi-Viz® orange case
- Blade style: C1

ltem No.	Lufkin No.	Length	Graduations
125244	1706D	100 ft.	10ths
125248	1706	100 ft.	inches
125251	HY1730CME	100 ft./30 m	ft./meters

LUFKIN SERIES 2000 IN CHROME-PLATED CASES

- Case designed to fit perfectly in the hand
- Lightweight, high stength chrome finished case
- Fits easily into most tape holsters
- Bright yellow blade has clear easy-to-read numerals
- Toggle lock positioned for convenient operation, holds blade securely
- Cushioned blade return
- Removable belt clip

Item No.

120112-S

120122-S

120133

• All shelf pack power tapes are carded

23120

2325D

2133D

Lufkin No.

	Lutkin FSL
120112-5	Engineer Lafer

LUFKIN SERIES HV1000 IN BLAZE ORANGE CASE

3⁄4 in. x 12 ft.

3⁄4 in. x 25 ft.

1 in. x 33 ft.

- Hi-Viz® case easy to find on the job
- Lightweight, high strength case designed to fit perfectly in the hand
- Fits easily into most tape holsters
- Bright yellow blade has clear easy-to-read numerals
- Toggle lock positioned for convenient operation, holds blade securely in any position

Blade Length and Width

Graduations

ft./in./16ths & ft./10ths/100ths

ft./in./16ths & ft./10ths/100ths

ft./in./16ths & ft./10ths/100ths

- Virtually unbreakable Quad Hook; four rivets for extra strength
- Cushioned blade return
- Removable belt clip

Item No.	Lufkin No.	Blade Length and Width	Graduations
120113-S	HV1048DM	1 in. x 25 ft./7.5 m	ft./10ths/100ths/metric
120115-S	HV1048CM	25 mm x 8 m	metric
120121	HV1425ED	1 in. x 25 ft.	ft./10ths/100ths
120124-S	HY1034DM	3⁄4 in. x 12 ft.	10ths/metric
120128	HV1425D	1 in. x 25 ft.	ft./in./16ths & ft./10ths/100ths
120134	HV1312D	3⁄4 in. x 12 ft.	10ths
121915 (SO)	HV1048CME	1 in. x 26 ft./8 m	ft./in./8ths/metric
121916	HV1433DM	1 in. x 33 ft./10 m	ft./10ths/100ths/metric



KOMELON MEASURING TAPES WITH BELT CLIPS

Available in power tapes, fiberglass tapes or nylon coated steel tapes in many lengths and graduation styles. All cases and reels are sturdy Hi-Visibility green ABS plastic.

870625	1" x 25' Power Tape
1001599-01	1" x 33' with nylon coated blade

```
Graduations: in/10ths
Graduations: in/10ths
```



SOKKIA/ESLON FIBERGLASS UTILITY TAPES (1/4 IN. WIDE)

Especially good for topographic surveys. Extremely light and slip- and tear-proof. (Not supplied with reel)

845022

2 Length: 50 m

Graduations: 5 cm





SOKKIA/ESLON™ FIBERGLASS OPEN-REEL TAPES (½ IN. WIDE)

Lightweight case is virtually shatterproof. The special handle design makes reeling quick. Width $1\!\!/_2$ in., with folding metal end hook.

ltem No.	Refill No.	Length
Printed on one	e side. Graduated	in ft./in./8ths.
845144	845164	100 ft.
845146	n/a	200 ft.
845148	n/a	300 ft.

Printed on both sides. One side graduated in ft./in./8ths, other side m/cm/2 mm.

845444	845464	100 ft./30 m
845445	n/a	165 ft./50 m

Printed on one side. Graduated in ft./10ths/100ths.

845244	845264	100 ft.
845245	845265	165 ft.
845246	845266	200 ft.

Printed on both sides. One side graduated in ft./10ths/100ths, other side m/cm/2 mm.

845542	n/a	50 ft./15 m
845544	845564	100 ft./30 m
845545	845565	165 ft./50 m

Printed on one side. Graduated in m/cm/2 mm.

845344	845364	30 m
845346	n/a	60 m
845348	845368	100 m



SOKKIA/ESLON FIBERGLASS APPRAISER'S TAPES

These long-lasting tapes have special hook ends to assure accuracy.

SOKKIA/ESLON WARRANTY

Sokkia/Eslon tapes are covered by a full one-year warranty. If your Sokkia/Eslon tape breaks or if it is defective, Sokkia Corporation will replace it at no charge for up to one full year from the original date of purchase. This warranty also covers defective or broken tape reels and cases. Details are supplied with tapes.

SUUNTO COMPASS/CLINOMETERS

Compasses	
802442	51-MC-2D Mirror Compass 0-360°
Sighting	
802510	51-KB20/360R Compass 0-360°
Accessories	
802503	51-K1335 Rubber Cover, Fits: 802530/802540/802575/802590 (SO)

Twin Precision Compasses/Clinometers

Two instruments in one. Built-in prismatic sighting for fast field use. Resists corrosion, water and impact. Use for directional indications and slope/height measurements with an accuracy of ±0.25°.

802506 1380 Tandem Compass/Clinometer

Clinometers

Use as a hand level, builder's level, optical plummet and slope indicator. Measures vertical angles, computes height, determines slope angles and levels for rough surveying. Liquid will not freeze or evaporate.

802575	51-PM5/360PC Clinometer
802590	51-PM5/66PC Height Meter with Slope Scale



802575

USHIKATA SURVEYING COMPASS

Handy and compact. A unique "O-BAC" device for one-touch zero setting provides a horizontal reading. Quick magnetic readings with a magnetic induction damper and stadia survey is available with the telescope reticle. Perfect for mountain, forest and range surveying.


S-25 Specifications

Telescope Horizontal Circle **Compass Circle** Verticle Circle Weight

Reversible, erect, 12x, 120 mm long 5', "O-BAC" zero setting Diameter 70 mm, 1° Full circle, 1° 1.0 kg

802635 Surveying Compass with Telescope and Case, 0-360° Ushikata Tracon S-25 802633 Aluminum Extension Tripod with Case (Ushikata Model No. 33)



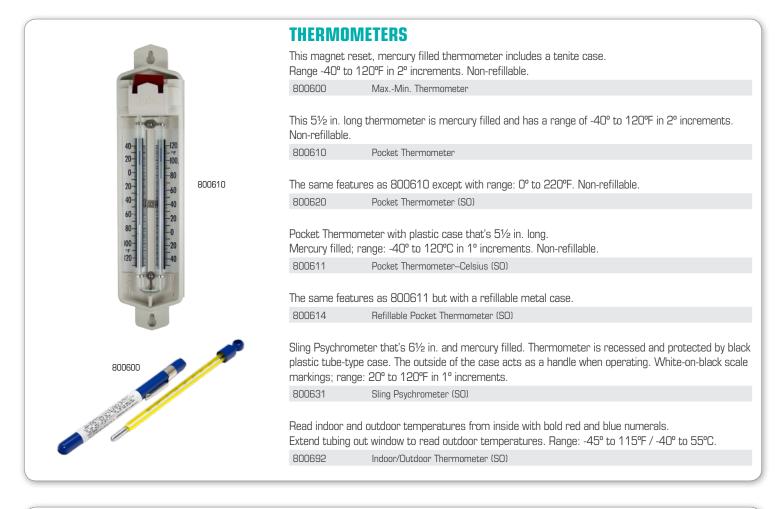



BI-THERM THERMOMETERS

As accurate as mercury thermometers, but without the need for safety precautions to avoid potential toxicity. Measures temperature with a bi-metallic coil attached to an indicator needle.

800650	1 in. dial; -40° to 160°F
800651	1 in. dial; -40° to 50°C (SO)
800660	1 in. dial; 0º to 220ºF
800672	2 in. dial; 0° to 550°F
800601	1¾ in. dial; 50° to 550°F



POCKET DIGITAL THERMOMETER

High precision pocket digital thermometer. Able to be recalibrated. Maximum/minimum temperature feature retains memory even when turned off. Two-stage off button with timer, auto-off feature to conserve battery, replaceable watch battery installed. $4\frac{1}{2}$ in. stainless steel stem. Range: -58° to 500°F / -50° to 260°C.

800690

Pocket Digital Thermometer

STAKE BAGS

Sokkia Heavy-Duty Stake Bag made from durable orange material and made to carry 18 in. or 24 in. stakes. These bags are made with a drain hole and an adjustable carrying strap.

801055	Heavy-Duty Stake Bag 18 in.
801056	Heavy-Duty Stake Bag 24 in.
801057	Rhinotek Stake Bag 18 in.

LATH BAGS

Sokkia Heavy-Duty Lath Bag made from durable orange material and made to carry 36 in. or 48 in. lath. These bags have an adjustable carrying strap.

801065Heavy-Duty Lath Bag 36 in.801066Heavy-Duty Lath Bag 48 in.

CARRY-ALL CASE

Sokkia Heavy-Duty Carry all bag will allow you to carry a full size wood tripod and also include an 8 ft. prism pole.

801080

Heavy-Duty Accessory Carry-All Case - 58 L x 91/4 D in.

PRISM BAGS

Sokkia Heavy-Duty Prism bags that are padded with thick dense foam and the exterior is made from durable orange material.

801070	Heavy-Duty Single Prism Bag, Interior Dimensions - 12 x 10 x 4 in. (w x I x d)
801071	Heavy-Duty Prism System Bag, Interior Dimensions - 12 x 18 x 5 in. (w x I x d)

DATA COLLECTOR CASES

Sokkia Data Collector Carrying Cases

559312	SHC2500 Carrying Case
559313	SHC250 Carrying Case
559314	SHC25/25A Carrying Case
559315	SHC236 Carrying Case
559316	Mesa Carrying Case
804903	Universal Data Collector Case



*All Bags are Made in USA.



PRESCO "TEXAS" FLAGGING


Colorfast and rainproof. Contains no toxic lead. Packed one dozen to a box; sold by the box. Size: 1 in. wide. Note: Colors cannot be assorted within the box.

8110	Solid 300 ft. roll. Specify color with last two digits:
	-00 Red, -01 Orange, -02 Blue, -03 Yellow, -04 White, -06 Black, -11 Green.
8112	Florescent 150 ft. roll. Specify color with last two digits:
	-00 Red Glo, -01 Orange Glo, -03 Yellow Glo, -04 Pink Glo, -06 Lime Glo

PRESCO "ARCTIC" FLAGGING

Excellent durability, perfomance, and temperature resistance down to -40°F. Packed one dozen to a box; sold by the box. 3 mm for standard colors, 5 mm for florescent colors. Note: Colors cannot be assorted within the box.

8110	Florescent 150 ft. roll. Specify color with last two digits:
	-69 Yellow Glo, -70 Orange Glo, -71 Pink Glo, -72 Blue Glo, -73 Lime Glo.
8110	Solid 300 ft. roll. Specify color with last two digits:
	-77 White, -78 Blue.



STAKE FLAGS

Vinyl flags securely attached to stiff steel wire stakes. Packed 100 to a bundle with 10 bundles per box. Sold by the box. Order in increments of 10.

8108	Small Flags (2½ x 3½ in.) – 21 in. stakes. Specify color with last two digits: -OO Pink Glo, -O1 Orange Glo, -O3 Yellow, -O6 White
8109	Small Flags (2½ x 3½ in.) – 30 in. stakes. Specify color with last two digits: -00 Pink Glo, -01 Orange Glo, -03 Yellow, -04 Red, -06 White
0802	Large Flags (4 x 5 in.) – 21 in. stakes. Specify color with last two digits: -11 Blue, -12 White, -13 Red, -14 Blue Glo, -15 Yellow, -16 Orange Glo, -17 Pink Glo, -18 Yellow Glo, -19 Red Glo, 099992 Orange
0803	Large Flags (4 x 5 in.) – 30 in. stakes. Specify colors with last two digits: -01 Blue, -02 Orange Glo, -03 Red, -04 White, -05 Yellow, -06 Blue Glo, -07 Pink Glo, -08 Lime Glo, -09 Red Glo, -16 Yellow Glo, -24 Orange, 080298 Green, 099071 Green Glo.
8113	Large Flags (4 x 5 in.) – 36 in. stakes. Specify colors with last two digit: -00 Pink Glo, -01 Orange Glo, -02 Blue, -03 Yellow



FLAGGING TAPE DISPENSER

Lightweight, rustproof and fits on a belt or waistband. Holds one roll. 811010 Flagging Dispenser



STAKE WHISKERS

Packed 25 per bundle. 40 bundles per box. 117___ -41 Orange, -50 Red, -51 Blue, -53 Pink Glo, -54 White, -55 Orange Glo.

AERIAL FLAGGING

Perfect for aerial mapping jobs where high visibility marking is needed for photography. Sold by the roll. 10164 White Roll, 300 ft. x 12 in.

SOKKIA.COM 29

MAG NAILS

Revolutionary new metal formula doubles or quadruples detection by metal detectors by retaining magnetism. Larger center point for easier driving. Packaged in boxes of 100.

0	
813345	3⁄4 x 1/8 in.
813346	1 x 5/32 in.
813347	1¼ x 3⁄16 in.
813348	1½ x ¼ in.
813349	2 x ¼ in.
813350	21/2 x 1/4 in.



STAKE TACKS

Steel, 7/8 in. long tacks with indented head to guide plumb bob point. Approximately 725 per 1 lb. box.

813270	Stake Tacks	
096000	Tack Ball	
		Lefter of
		813270

NAIL MARKERS

One-inch squares made of plastic impregnated nylon in florescent orange. Approximately 70 per package.

811501	Nail Markers with 1/4 in. hole	8
811502	Nail Markers with 1/8 in. hole	0



MONUMENT SPIKES

Large monument spike 3/8 in. square shank. Galvanized with chisel point and button head. Makes ideal bench mark or turning point.

813262	6 in. Monument Spike	
813264	8 in. Monument Spike	
		1

813262

LEAD WIRE

For lead and tack reference points. Fits hole cut by No. 813089 concrete drill. Diameter: 3/8 in., Length: 15 in.

813220 Lead Wire



Cast from solid brass. Ribbed shank prevents turning or loosening. Non-glare finish, $1/8~{\rm in.}$ thick top. Shank area 0.4 sq. in., length: 2 in.

813400	1 3/8 in. Top Diameter	
813403	2 in. Top Diameter	4
813406	2½ in. Top Diameter	
813408	3 in. Top Diameter	
813408-SF	3 in. Top Diameter Satin Finish	



DOMED SURVEY MARKERS (MADE IN USA)

Solid brass with curved heads. Ribbed shank prevents turning or loosening. Shank area: 0.4 sq. in.; shank length: 2 in.

-	
813410	1 3/8 in. Top Diameter
813413	2 in. Top Diameter
813416	2 ½ in. Top Diameter
813418	3 in. Top Diameter



SURVEYOR'S RAISED SHINERS

Tin, 1¼ in. diameter with center punch and crimped edges. Especially valuable for indicating semi-permanent points with spikes or nails. 1 lb. carton. Approximately 250 per box.

813431 Raised Shiners



MAG HUBS

The Mag Hub is magnetized for easy detection and zinc plated to resist corrosion. It has a large center point and is easy to carry. Not for use in concrete or asphalt. 30 lb. box. 1/4 in. diameter.

 813351
 4 in. Mag Hub Nail

 813352
 6 in. Mag Hub Nail

 813353
 8 in. Mag Hub Nail



SURVEYOR'S FLAT SHINERS

Flat Shiners

Tin, 2¼ in. diameter with center punch and crimped edges. Especially valuable for indicating semi-permanent points with spikes or nails. 3 lb. carton.

813430







PLUMB BOBS

Screw caps and hardened steel points with standard threads. Storage space for an extra point inside the cap.

812212	12 oz. Plumb Bob
812214	14 oz. Plumb Bob
812216	16 oz. Plumb Bob
812218	18 oz. Plumb Bob
812224	24 oz. Plumb Bob
812290	Extra Point (fits all listed plumb bobs)
812293	Extra Cap (fits all listed plumb bobs)



PLUMB BOB CORDS

Made with the finest quality braided cord.	
812413	White Poly; 50 yd. Spool
812423	Orange Poly, 50 yd. Spool
812439	Fluorescent Yellow Poly, 50 yd. Spool
812440	Flourescent Red Poly, 50 yd. Spool





LEATHER SCABBARDS

 Rugged leather with stitched and riveted pockets that hold tape or Gammon Reel and a

 16 or 18 oz. plumb bob.

 812365
 Leather Scabbard for Gammon Reel and Plumb Bob

Extra-heavy stitched and riveted pocket.

	•
812350	Belt for Plumb Bob Scabbard
812315	Scabbard for 10–14 oz. Plumb Bobs
812325	Scabbard for 16–18 oz. Plumb Bobs
812335	Scabbard for 24–32 oz. Plumb Bobs



TALLY REGISTER


Four-digit capacity with quick return to zero. 879200 Tally Register



GAMMON REELS

Handy, retracting plumb bob cord reel means no more winding and no more broken or muddy string. Includes 72 lb. test nylon string that weighs $1\frac{1}{2}$ oz.


		-	
812448	12 ft. Gammon Reel, B	Black/Orange	
812449	12 ft. Gammon Reel, \	White/Orange	
812450	6½ ft. Gammon Reel,	White/Orange	
812451	24 yd. Nylon Refill, Re	ed/Orange	
812452	24 yd. Nylon Refill, Flu	uorescent Yellow	
812454	24 yd. Nylon Refill, Flu	uorescent Red	



TARGETS

Available in "Quik-Stik," plastic and translucent plastic variations.		
812620	Plastic target notched for attaching to line $2\frac{1}{2} \times 4$ in., red/white	
812625	Translucent Plastic target laminated for brilliant illumination and notched for attaching to line 2% x 4 in., black/orange	
812640	Quik-Stik target with paper back that peels off instantly and sticks to any surface 2 x $3^{1}\!\!/_{2}$ in. (package of 25)	

AXES			
			. 0
813035	Estwing [®] Hand Axe with Leather Sheath, 1.7 lbs.	and the second s	
813015	Bahco Bush Axe 7¼ in. Swedish Steel Blade, 20 in. Hickory Handle	813019	813005
813016	Bahco Replacement Handle: 20 in.		
813017	Bahco Replacement Blade		
813019	Hatchet Axe with Leather Sheath (SO)		813015
813005	Hatchet Broad 36 oz. Plumb Axe	813035	
813045	Estwing Broad Hatchet, 17 in., 28 oz. (SO)	Penn	TR.
HAMMER 813030	S Estwing Hammer: 30 oz.		
813065			
813065	Estwing Straight Claw Hammer: 16 oz.		A CONTRACT
	Estwing Rock Pick Hammer: 11½ in. Handle, 22 oz.	813030	813039
813023	Sheath for Estwing Rock Pick Hammer		-
813007	Estwing Long Handle Rock Pick Hammer: 161/4 in. Long Handle	1	N 1
813039	Estwing Rock Pick with Leather Wrapped Grip: 13 in. (SO)		
813012	Engineering Sledge: 15 in. Handle, 4 lbs.		
813013	Engineering Sledge Replacement Handle	and the second se	
813037	Estwing Sledge/Drilling Hammer: 4 lbs.	813022	813007
813038	Estwing Sledge/Drilling Hammer: 3 lbs.	- ·	
813060	Sledge/Drilling Hammer: 4 lbs., 16 in. Long Handle		
813146	Engineer's Hammer: 48 oz.		1
813018	Sledge Drill Hammer: 10 in. Handle, 4 lbs.		P (and
		•	
		813060	813018
CHISEL		813060	813018
	Estwing Concrete Chisel: ½ x 12 in.	813060	
813085		813060	
813085 CONCRET		813060	813085
813085 CONCRET 813089	'E DRILL	813060	813085
	'E DRILL	813060	813085
813085 CONCRET 813089 GAD	E DRILL Concrete Drill: 10 x 5/8 in., "V" Edge Gad: ¾ x 1¾ x 18 in.		813085

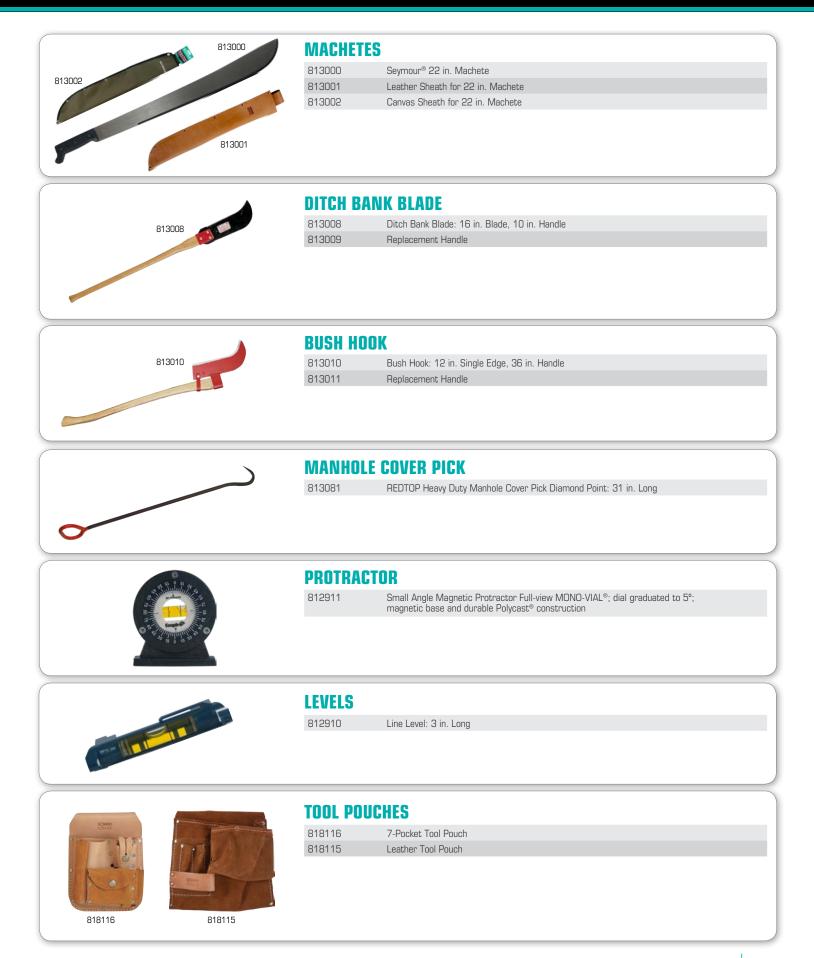

DIXON REDIMARK® MARKER

Tight-seal, no-roll cap makes marker last longer; stores on base when not in use. Chisel point is ideal for marking on wood, metal, glass, plastic or paper. Aluminum body gives 30% more volume. Sold by the dozen.

813471 813472 Black Dixon Felt Tip Marker Red Dixon Felt Tip Marker



IDEAL MARK® MARKING PEN

Industrial-grade marker for surveying and construction layout. Valve action with indelible black ink. Replaceable tip and metal cap with pocket clip. Sold by the dozen.

813501	Black Ideal Mark with Replaceable Bullet Tip, Box of 12
813502	Red Ideal Mark with Replaceable Bullet Tip, Box of 12
813503	Replacement Tip, Bullet Style (12 tips per package)
813504	Replacement Tip, Chisel Style (12 tips per package)



CARBIDE POINT SCRIBES AND HEAVY DUTY SCRIBERS

For marking steel, concrete, stone, lumber and almost any other surface.

813050	Carbide Point Scriber; 5¼ in.
813051	Replacement Scriber Point (6 per package)
813053	Premium Scribe; 5 in.
813054	Giant Scribe
813055	Replacement Tip for 813053/813054 (6 per package)



DIXON® LUMBER CRAYONS

For marking steel, concrete, stone, lumber and almost any other surface. Length: 41/2 in.; diameter: 1/2 in. Packed 12 per box; sold by the box.

813461	Carbon Black Crayon
813462	Yellow Crayon
813463	Red Crayon
813464	Fluorescent Pink
813465	Blue Crayon
813467	White Crayon







Wood Crayon Holder





AERVOE MARKING PAINT (17 OZ.)

- Aervoe's Survey Marking Paint offers the best in color visibility and retention, durability, and a lasting mark of up to six months
- Non-freezing and operational to 14°F
- Colors are formulated to meet standards set by OSHA and APWA/One Call Systems
- Mark is visible for up to six months depending on traffic and exposure
- Adheres to many surfaces including wood, concrete, asphalt, brick and gravel
- Not recommended for use on turf surfaces

813454	Flo Orange #222
813460	Flo Pink #229

SPRAY PAINT MARKING WAND

Lightweight durable steel and plastic construction with a comfortable grip for easy marking.

813958 Marking Wand, 24 in. Handle



SPRAY PAINT MARKING PISTOL

Use with marking paints for increased accuracy and no mess. Light touch spray control. Easy loading.

813959 Marking Pistol



813630

HARD HATS

High-density polymer for excellent protection against severe impact. Molded in one piece with no metal; protects against corrosive materials. Meets ANSI Z89. 1-196 (Class A) — Federal Spec GGG-H-142g. Fits sizes 6 3/8 through 8. Weight: 11 oz.

813630 Yellow 813631 White

SURVEYOR'S UMBRELLA

 $63\ \text{in.}\ \text{spread}\ \text{and}\ 8\ \text{ft.},\ 3\ \text{section}\ \text{pole}\ \text{with}\ \text{baked}\ \text{aluminum}\ \text{enamel}\ \text{finish}$

813640	Heavy-drill fabric umbrella; blue and yellow	
813641	Water resistant vinyl umbrella; yellow with blue logo	
813642	Replacement Pole for 813640/813641, diameter 11/4 in. (SO)	



FIRST AID KITS

The jobsite kit is designed to serve most minor first aid issues for up to 25 people. The truck kit is designed for up to 10 people.

813094First Aid Kit (Truck)813095First Aid Kit (Jobsite)



COMMON SOKKIA CABLES – BATTERIES – CHARGERS

COMMON 20	KKIA GABLES – BAITEKIES – GHAKGERS	402-0-0084
210160056	BDC35A (SET x100 Series, PowerSET)	
60901-SURSK	BDC46A (RCPR3/4/5, SDL30/50, SET 30R series)	
221007000-SURSK	BDC70 (SX, SRX, NET, CX, FX)	
210160091-SURSK	CDC68 Charger (for BDC70 and BDC46)	
02-0-0084	GSR2700IS/ISX Internal Battery	
288-SURSK	Hirose to 9pin cable (older SET's, Gowin, Cygnus, SET60)	60901-SURSK
35039	DOC27 USB to Hirose (USB adaptor for Hirose connector to go to USB port)	
1001550-01-SURSK	DOC210E (SX, CX, FX to 9 pin)	





813652

TRAFFIC CONES

High-intensity fluorescent red-orange PVC cone with weighted base for stability.

813612	12 in. Traffic Cone	
813618	18 in. Traffic Cone	
813619	28 in. Traffic Cone	

NON-REFLECTIVE "SURVEY CREW" SIGN

Non-reflective, high-visibility orange sign with rib support. Roll-up design for daytime use. Stand sold separately.

813652	36 in. SURVEY CREW non-reflective sign
813653	48 in. SURVEY CREW non-reflective sign
813656	Replacement Rib Set 36 in.
813657	Replacement Rib Set 48 in.

REFLEXITE "SURVEY CREW" SIGN

Reflexite Super Bright[™] orange sign with rib supports. Roll-up design for day and night visibility. Stand sold separately.

813654	36 in. SURVEY CREW Reflexite sign (SO)
813655	48 in. SURVEY CREW Reflexite sign (SO)
813656	Replacement Rib Set 36 in.
813657	Replacement Rib Set 48 in.



UNIFLEX SCREWLOCK SIGN STAND

NCHRP-350 approved design. Single heavy-duty coil spring to hold 36 in. and 48 in. signs. Kick-release adjustable legs for easy setup. Stand only. Sign sold separately.

813651 Uniflex Screwlock Sign Stand

T-50 ECONOMY TRIPOD SIGN STAND

NCHRP-350 approved design with roll-up signs on low speed roadways. Holds 36 in. or 48 in. signs. For day and night visibility. Stand only. Sign sold separately.

813650 T-50 Economy Tripod Sign Stand



CAUTION TAPE

Caution tape; yellow; 3 mil, 1,000 ft.

811050

Caution Tape (1 roll)



16900 W. 118th Terrace • Olathe, KS 66061

800.4.SOKKIA • www.sokkia.com SOK-1017 Rev B 1/15

Due to the printing process, the colors of the products printed in this catalog may vary slightly from those of actual products. Products displayed within are not to scale. Designs and specifications are subject to change without notice. All weights are approximate. Certain products in this catalog may not be available in specific market areas. Please consult with your nearest Sokkia representative for details. © 2015 Topcon Corporation. All rights reserved. Sokkia is a trademark of Sokkia Topcon Co. Ltd. Other trademarks and trade names are those of their respective owners.