


# SHC500

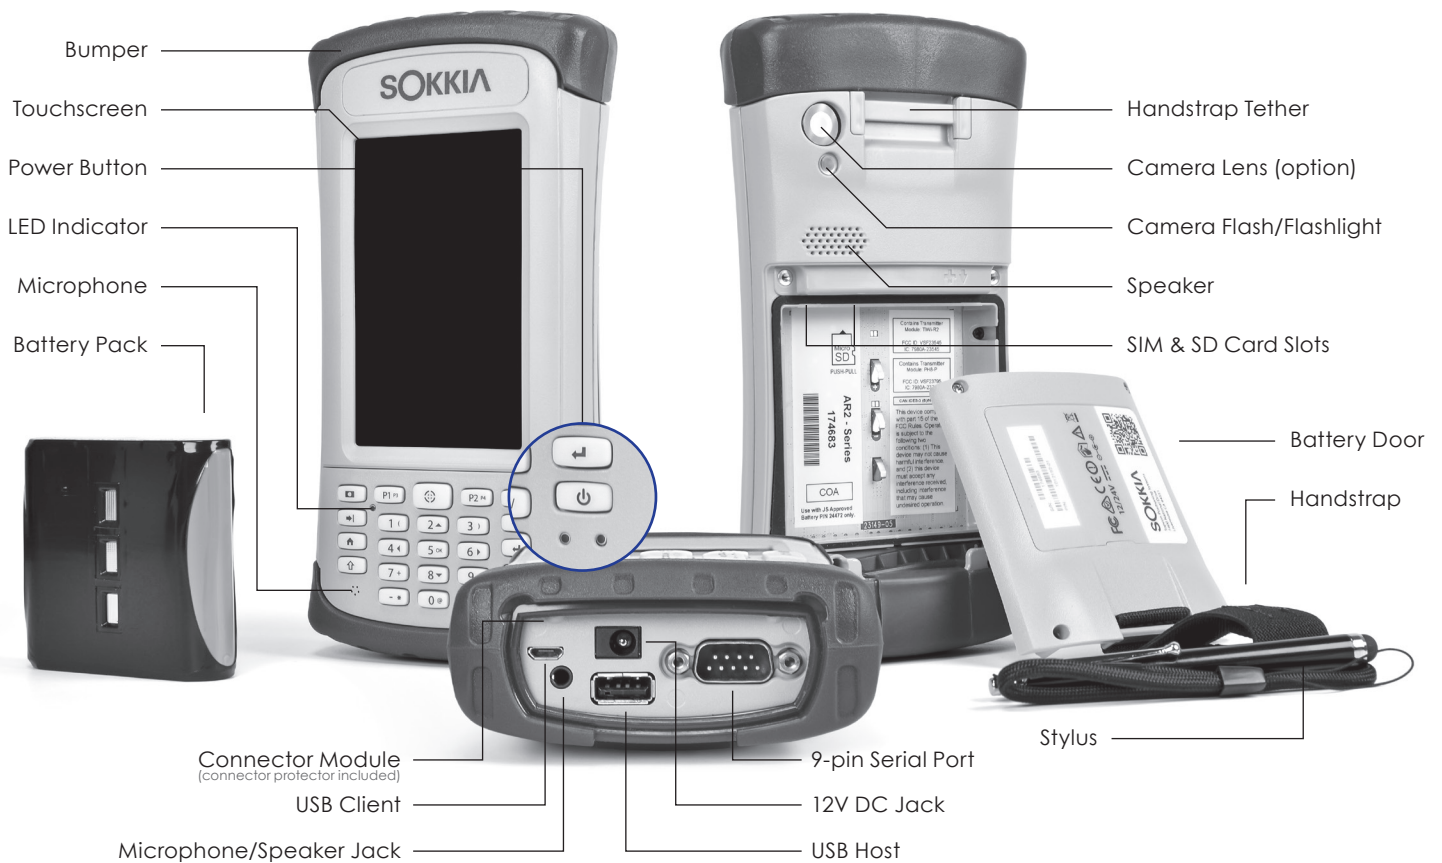

## SOKKIA

### Perform Initial Tasks

- 1 Loosen the 4 captive screws on the battery door with a #1 Phillips screwdriver. Remove the door.  
CAUTION: The handheld is not sealed when the door is removed.
- 2 Place the battery pack into the compartment.
- 3 Replace the battery door and tighten the screws.
- 4 Plug the AC power charger into a wall socket and the DC jack on the handheld.
- 5 The handheld powers on and several screens appear. When the Time screen is shown make adjustments if needed and select OK.
- 6 Charge the battery pack at room temperature for 5 hours.



You can download the SHC500 Handheld Field Controller operating system, operator's manual, and quick start guide from <http://us.sokkia.com/products/software-field-controllers/field-controller-hardware>